

182 JY4MxxxH66(H) | Multi Busbar Monocrystalline Half Cell PV Module

Power Output : 480W - 505W
Power Tolerance : 0W ~ +5W
Maximum Efficiency : 21.3%

Electrical performance parameters | STC

Power Output	Pmax(W)	480	485	490	495	500	505
Rated Power Maximum Voltage	Vmp(V)	37.78	37.93	38.08	38.23	38.38	38.53
Rated Power Maximum Current	Imp(A)	12.71	12.79	12.87	12.95	13.03	13.11
Open Circuit Voltage	Voc(V)	44.95	45.10	45.25	45.40	45.55	45.70
Short Circuit Current	Isc(A)	13.59	13.67	13.74	13.82	13.90	13.97
Module Efficiency	(%)	20.2	20.4	20.6	20.8	21.1	21.3
Power Tolerance	(W)	0~+5W					

* STC : 1000W/m2 irradiance, 25°C module temperature, AM1.5 spectrum.

Power measurement error +/- 3%



Electrical performance parameters | NMOT

Power output	Pmax (W)	359	363	367	371	375	379
Rated Power Maximum Voltage	Vmp (V)	34.60	34.74	35.0	35.13	35.26	35.40
Rated Power Maximum Current	Imp (A)	10.37	10.44	10.49	10.55	10.63	10.70
Open Circuit Voltage	Voc (V)	41.36	41.49	42.22	42.35	42.57	42.71
Short Circuit Current	Isc (A)	11.14	11.20	11.26	11.33	11.40	11.46

* NMOT:800W/m2 irradiance, 20°C module temperature, 1m/s wind speed.


Power measurement error +/- 3%

Structure Features


Solar Cell	182MONO(Half Cell)
Solar Cell Array	132 pcs(6×22)
Module Dimension	2094×1134×35mm
Weight	26.6 kg
Glass	3.2 mm (0.13 inches) highly transparent anti-reflection coating tempered glass
Back sheet	Black
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm ² , L=300 mm, PV cable
Diode Quantity	3
Wind Pressure/Snow Pressure	2400pa / 5400pa
Connector	MC4 Compatible

* More details please read the installation manual.

Module Dimension

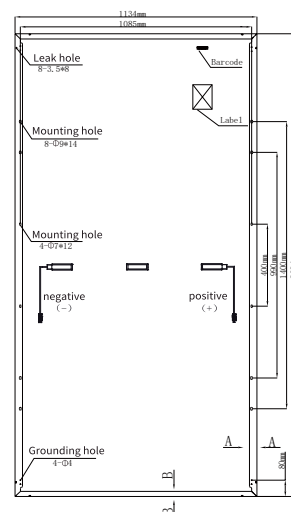

Back View

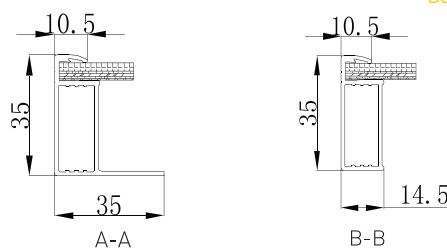

Temperature Characteristics

Solar Cells Rated Working Temperature	44±2°C
Temperature Coefficient (Isc)	+0.06%/°C
Temperature Coefficient (Voc)	-0.35%/°C
Temperature Coefficient (Pmax)	-0.38%/°C

Maximum Ratings

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Maximum Fuse Rated Current	25A


Optional

- Connector ☐ Original MC4
- Cable length ☐ 1000mm ☐ 900mm
- Frame ☐ Silver
- Solar Module Dimension ☐ 2094x1134x40mm
- Back sheet color ☐ White ☐ Transparency

Packaging

- Number of modules per pallet 31 pcs
- 17.5*2.8m Flatbed loading 992 pcs
- 13.0*2.35m Flatbed loading 744 pcs
- 40HQ Standard container 682 pcs

I-V curves/P-V curves of module under different irradiation(405w)



I-V curves of module under different temperature(405w)

